
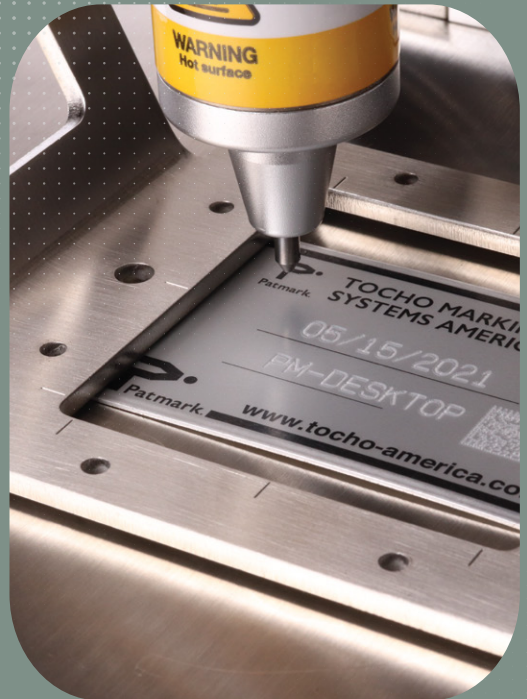



ADAPTABILIDAD

CONECTIVIDAD

VERSATILIDAD


MARCADORAS MICROPERCUSIÓN



marketing@markinbox.mx



- METAL
- HIERRO
- ALUMINIO
- INOXIDABLE
- Y OTROS
- PLÁSTICO
- ABS
- PA
- PES
- PP
- MADERA




	MB3315S	MB8020S	MB1010	MB2015
Working area	Xaxis 33mm (1.3") x Yaxis 15mm (0.6")	Xaxis 80mm (3.1") x Yaxis 20mm (0.8")	Xaxis 100mm (4") x Yaxis 100mm (4")	Xaxis 200mm (8") x Yaxis 150mm (6")
Cable length	3M (10')	3M (10')	2M (6')	2M (6')
Dimensions	116mm (4.6") x 73mm (2.9") x 190mm (7.5")	173mm (6.8") x 83mm (3.3") x 214mm (8.4")	200mm (7.9") x 217.5mm (8.6") x 228mm (9")	308mm (12") x 269mm (10.6") x 249mm (9.8")
Weight	1.5kg (3.3lbs)	2.1kg (4.6lbs)	4.5kg (9.9lbs)	6.3kg (13.9lbs)
Standard post dimensions	220mm (8.7") x 300mm (11.8") x 573mm (22.6")			310mm (12.2") x 370mm (14.6") x 544mm (21.4")
Standard post weight	7kg (15.4lbs)			10.7kg (23.6lbs)

	MB2S Controller
Power	AC100V ~ 240V 50/60Hz
Dimensions	66mm (2.6") x 144mm (5.7") x 217mm (8.5")
Weight	1.4kg (3.1lbs)
Connectivity	USB / RS232C / LAN
D.I/O	input 12 pins / output 8 pins Save up to 255 files

sketchbook2 Specification table

OS	Windows 7 or higher
Operating environment	Memory 1 GB or more, monitor resolution 1280 x 768 or higher
Corresponding model	MB3315S, MB8020S, MB1010, MB2015
Settable character height	0.1 mm or larger (0.1 mm pitch) to maximum Y value
Settable character width	Character height x 1% ~ 200%
Horizontal character pitch	0.1mm~
Fonts	[Original MarkinBOX fonts] MB font, Elegant font, 5x7 font * Including alphanumeric characters, hiragana, katakana, miscellaneous symbols ----- [PC fonts] * PC fonts are valid only when a PC is always on
Logos	JPEG, BMP data are read and registered on the creation screen ----- Automatic conversion of DXF data ----- * Straight lines, circles, ellipses, polygons supported
Serial marking	00000001 ~ 99999999
Calendar marking	Year, month, day, hours, minutes, seconds, Julian dates
2D codes	Data matrix, QR code
Number of creation fields	Up to 50 fields
Barcode reader	Automatic marking of data from barcode reader
File communication	Up to 255 files can be sent to the controller
Password functions	Two-level password setting (administrator/user)
Others	Drawing editing functions supported

Note: Specifications can be changed without prior notice for quality improvement.

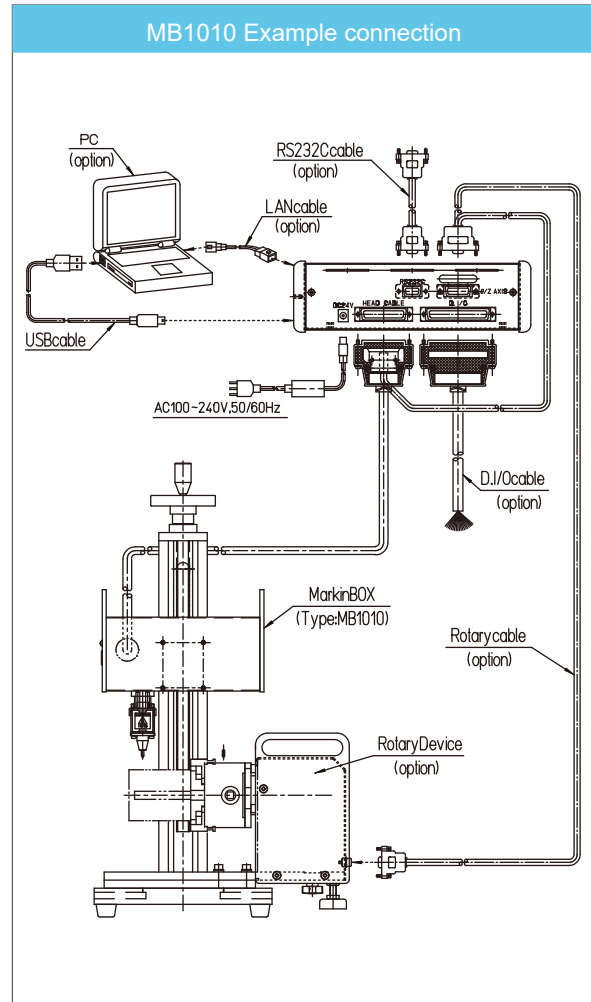

Todos los sets incluyen: Cabeza de Marcado, Cable AC, Cable Pines(3m), Cable USB, Programa SketchBook, Controlador, 1 Pin standard 120



PM-3315

Power supply	AC adapter	Input: AC100V-240V, 50/60Hz (120W)
	Lithium-ion battery	*25.2V, 2.0Ah
	Battery charger	Input: AC100V-240V, 50/60Hz
Weight	When using AC adapter	2.3kg (4.9lbs)
	When using lithium-ion battery (*2Ah type)	2.9kg (6.4lbs)
Dimensions	When using AC adapter	124mm (4.9in) x 221mm (8.7in) x 250mm (9.9in)
	When using lithium-ion battery (*2Ah type)	124mm (4.9in) x 221mm (8.7in) x 298.4mm(11.7in)
Marking area		X axis 33mm (1.3in) x Y axis 15mm (0.6in)
Software	App	Wi-Fi
	Windows software	Wi-Fi, USB
Markable materials		Metal (up to about HRC62), plastic, paper, and wood



PM-8020

Power supply	AC adapter	Input: AC100V-240V, 50/60Hz (120W)
	Lithium-ion battery	*25.2V, 2.0Ah
	Battery charger	Input: AC100V-240V, 50/60Hz
Weight	When using AC adapter	3kg (6.6lbs)
	When using lithium-ion battery (*2Ah type)	3.5kg (7.8lbs)
Dimensions	When using AC adapter	182mm (7.2in) x 254mm (10in) x 250mm (9.9in)
	When using lithium-ion battery (*2Ah type)	182mm (7.2in) x 254mm (10in) x 298.4mm (11.7in)
Marking area		X axis 80mm (3.1in) x Y axis 20mm (0.8in)
Software	App	Wi-Fi
	Windows software	Wi-Fi, USB
Markable materials		Metal (up to about HRC62), plastic, paper, and wood



PM-5050

Power supply	AC adapter	Input: AC100V-240V, 50/60Hz (120W)
	Lithium-ion battery	N/A
	Battery charger	N/A
Weight	When using AC adapter	10kg (22lbs)
	When using lithium-ion battery (*2Ah type)	N/A
Dimensions	When using AC adapter	245.5mm (9.6in) x 344mm (13.5in) x *353mm (13.9in) *at max part-height 100mm (4")
	When using lithium-ion battery (*2Ah type)	N/A
Marking area		50mm (2") x 50mm (2")
Software	App	N/A
	Windows software	USB